

XS-XVR6108S-4KL




DVR 5n1 X-Security

8 CH analog (8Mpx) + 8 IP (8Mpx)

Audio over coaxial

8M (7FPS) Recording Resolution

8 CH Human and vehicle recognition

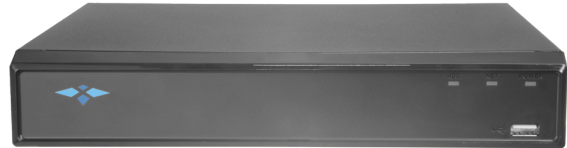

X-Security

DVR 5n1

8 CH video HDTVI/HDCVI/AHD/CVBS / 8+8 IP / 1 CH audio

H.265+/H.265/H.264+/H.264

Resolution 8Mpx,6Mpx, 5Mpx,4Mpx,1080p (25-30FPS) / 720p (50-60FPS)

PTZ Control (RS485/Coaxial)

Audio over coaxial

HDMI Full HD, VGA & CVBS Outputs

Facial Recognition

Mouse

2 USB Ports

Space for 1 HDD

Compact size

Specifications

Brand	X-Security
Video format	HDTV / HDCVI / AHD / CVBS / IP
Video inputs	8 Channels BNC (HDTV / HDCVI / AHD / CVBS)
Hybrid configuration	Up to 16 IP Channels (8Mpx), replacing all the BNC channels
Video outputs	1 HDMI 1080p, 1 VGA
Video / audio compression	H.265+ / H.265 / H.264+ / H.264
Display resolution	HDMI: 3840 x 2160, 1920 x 1080, 1280 x 1024, 1280 x 720
Total bandwidth	128 Mbps
Recording resolution	8M (7FPS) / 6M (10FPS) / 5M (12FPS) / 4K-N, 4MP, 3MP(15fps) / 4M-N or 1080P or 720P or 960H or D1 or CIF (25/30fps)
Main Stream coding	8M (7FPS) / 6MP(10FPS) / 5MP(12FPS) / 4K-N, 4MP, 3MP(15FPS) / 4M-N, 1080P, 720P, 960H, D1, CIF (25/30FPS)
Extra Stream coding	960H(15FPS) / D1, CIF(25/30FPS)
Simultaneous multifunction	Pentaplex: Live, Recording, Playback, Backup and Remote Access
Audio inputs	1 Channel RCA
Audio outputs	1 Channel RCA
Bidirectional audio	Reusing the audio input/output
Alarms IN/OUT	No
Video analysis	IVS: Face detection / People and vehicle recognition / Line crossing / Intrusion
Intelligent motion detection	Up to 8 channels capable of classifying targets amongst humans and vehicles
Recording method	Manual, programmed, motion detection, alarm
Backup	USB / Network
Internal memory	1 SATA HDD 3.5" of up to 10 TB (not included)
Communication	RS485 (PTZ) / 2 x USB (Mouse and backup) / RJ45 10/100 (Ethernet)
Remote access	Web browser (ActiveX), mobile phone application or PSS software
Power	DC 12V / 2A
Dimensions / Weight	44.7 (H) x 260 (W) x 238 (D) mm / 1 Kg